


Nouzové svítidlo


LED Escape sign luminaire Luminaire for central emergency light supply, for single luminaire monitoring via DALI, settable emergency light level; addressing also alternatively possible visually or via EZ-addressing; surface mounted; control unit with NFC interface for addressing, configuration and maintenance via PROset Pen (article no.: 22170290) or PROset app; addressing also alternatively possible visually or via EZ-addressing; Maintained mode: -30°C to +30°C, non-maintained mode: -30°C to +35°C; power supply: 220-240 V AC (+/- 10%) 50-60 Hz; 176-280 V DC; white polycarbonate base unit with metal clips at sides; basic version can be fitted to ceiling without tools; plug-in terminals for through-wiring up to 2.5 mm²; no tools required to fit frameless pictogram; non-maintained and maintained mode possible; Luminaire input power: 4.7 W; 10 % dimming value in emergency mode; protection rating: IP65, class of protection: SC1; Impact strength: IK03; dimensions of luminaire including escape sign: 335 x 55 x 238 mm; weight: 0.44 kg, Luminaire wired with halogen-free leads; max. line length from emergency power source to last luminaire: 200 m.; Luminaire with D symbol (for use in environments in which the accumulation of conductive dust on the luminaire can be expected)

Escape sign for. Diffuser made of opal polycarbonate with additional downward light outlet and internal longitudinal prisms to help to illuminate the escape route; escape sign printed using digital print technology; tool-free mounting to the main housing, escape sign according to ISO 7010: 2-sided; symbol: Emergency exit. Direction arrow sideways with ; Recognition distance according to EN 1838: 32 m; Dimensions: 335 x 55 x 165 mm, weight: 0.65 kg

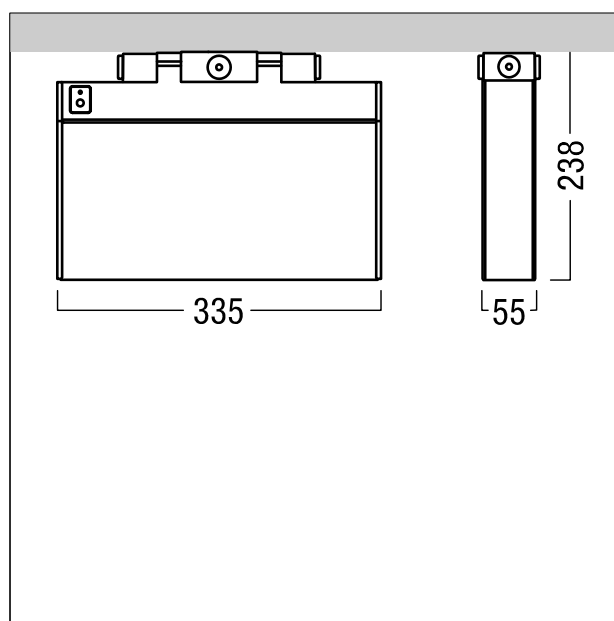

Křivka svítivosti

STD – standard

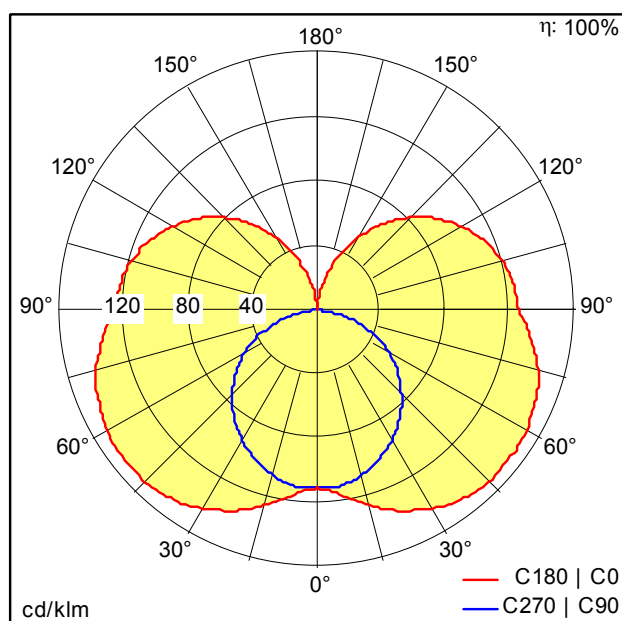

- Světelný zdroj: LED
- Světelný tok*: 117 lm
- Celkový nouzový světelný tok: 11 lm
- Světelný výkon svítidel*: 25 lm/W
- Předřadník: 1 x 89800571 EM TR EM PowerLED NDA 100 DIM 5W
- Střední dimenzovaná životnost*: L90 50000h při/u 25°C
- Příkon svítidla*: 4,7 W Výkonový faktor = 0,72
- Příkon v pohotovostním režimu*: 1,3 W
- Řízení: Dali stmívatelné do 10%

Viz také doplňkové informace na následující straně

