


Stropní vestavné LED svítidlo


LED ceiling-recessed luminaire (pre-assembled luminaire); "stableWhite" LED luminaire, symmetric wide-beam light distribution with maximum luminaire efficiency and optimum photometric properties; lamp(s): 15 W LED; Colour rendering Ra > 80, colour temperature 4000 K (neutral white); Chromaticity tolerance (initial MacAdam): 3; Luminaire luminous flux: 1756 lm, Luminaire efficacy: 117 lm/W; service life: 50000h at 85% luminous flux; includes separate control unit; high-quality reflector unit fixed to modular LED lighting chamber by twist-and-lock mechanism; high-efficiency LED lighting chamber is integrated in optimised, passive thermal management system of diecast aluminium; reflector: , faceted, aluminized, highly reflective, iridescence-free; reflector/trim made of high-quality, UV-resistant polycarbonate; cover ring white; mounting ring of Glass fibre-reinforced polycarbonate (PC), grey; luminaire unit can be fitted quickly without tools using twist-and-lock mechanism; IP44_IP20; luminaire wired with halogen-free leads; power connection: 3-pole connector terminal, loop-in/loop-out possible; mains voltage: 220-240V / 0/50/60Hz, for use with 220V DC central battery; tool-free quick installation using antislip spring clips in ceilings of thickness 1-40mm; ceiling cutout: 150mm, recess depth: 113mm; weight: 0.82 kg;

Note: EN12464-compliant with UGR<19 (aluminized reflector type) for office applications

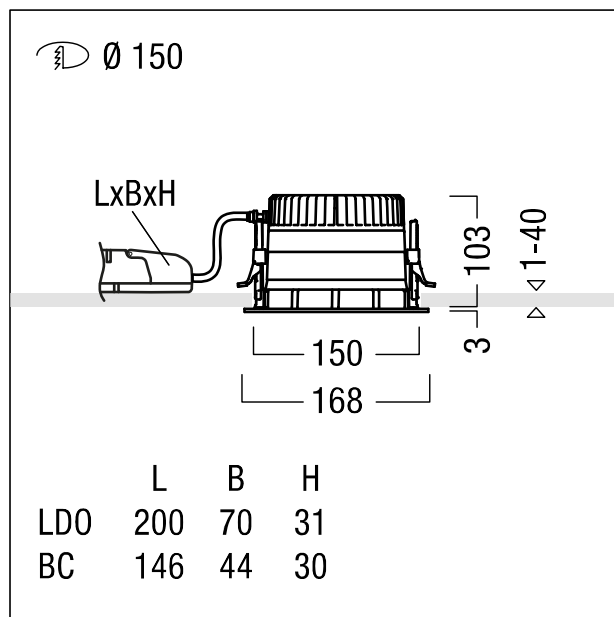

Křivka svítivosti

STD – standard

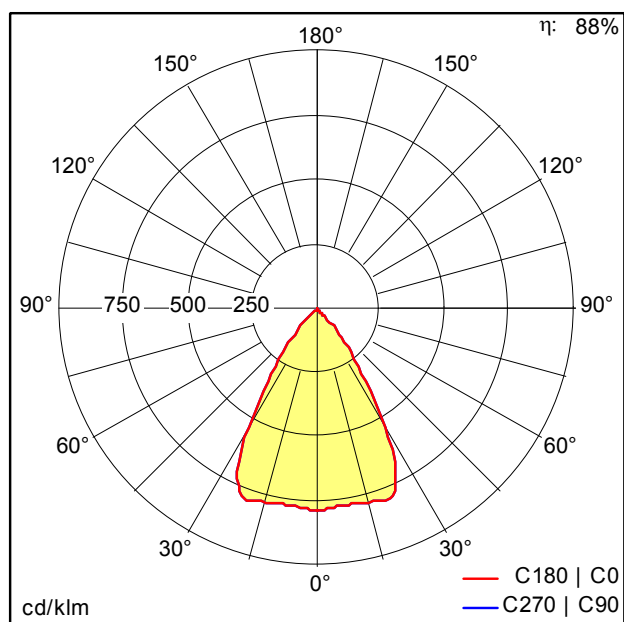

- Světelný zdroj: LED
- Světelný tok*: 1756 lm
- Světelný výkon svítidel*: 117 lm/W
- Index podání barev - CRI min.: 80
- Předřadník: 1 x 28001260 DRV TR LC 17W 700mA 50V F #flexC SR EX Z
- Teplota chromatičnosti: 4000 Kelvin
- Barevná tolerance v místě (MacAdam): 3
- Střední dimenzovaná životnost*: L85 50000h při/u 25°C
- Příkon svítidla*: 15 W Výkonový faktor = 0,94
- Kategorie údržby: C - Reflektor nahoře uzavřený

Hodnoty označené * představují stanovené rozměrové hodnoty. Výkon a světelný tok podléhají zpočátku toleranci až do +/- 10 %. Pokud není uvedeno jinak, platí hodnoty pro okolní teplotu 25°C.