


Nouzové svítidlo

LED Escape sign luminaire, Luminaire for central emergency light supply, for single luminaire monitoring via DALI, settable emergency light level; surface mounted; housing made of polycarbonate white (RAL 9016), injection moulded; addressing also alternatively possible visually or via EZ-addressing; luminaire easy to install; zero maintenance thanks to LED technology; 2 supplementary high power LEDs and asymmetric lenses adjustable through 360° for escape route lighting; uniform backlighting of pictogram; luminance > 500 cd/m² in the white region; Luminaire input power: 6.2 W; protection rating: IP42, class of protection: SC2; Impact strength: IK05; non-maintained and maintained mode possible, Maintained mode: -30°C to +40°C, non-maintained mode: -30°C to +45°C; power supply: 220-240 V AC (+/- 10%), 50-60 Hz; dimensions of luminaire including escape sign: 232 x 46 x 176 mm; weight: 0.43 kg; Luminaire wired with halogen-free leads; max. line length from emergency power source to last luminaire: 200 m.; Luminaire with D symbol (for use in environments in which no unusual accumulation of dust is expected); please order escape sign separately


Příslušenství:

Escape sign for , cover with escape sign made of white PC and digitally printed; escape sign according to ISO 7010: 1-sided; symbol: Emergency exit. Direction arrow sideways with; Recognition distance according to EN 1838: 22 m; dimensions: 222 x 5 x 110 mm; weight: 0.19 kg.

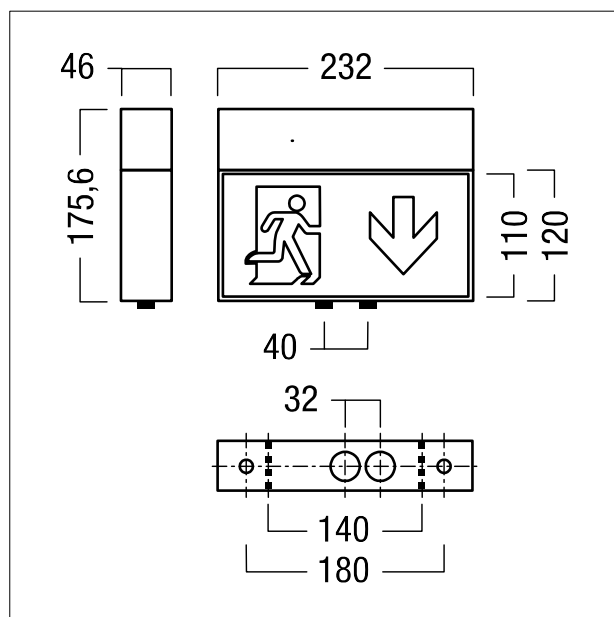

Křivka svítivosti

STD – standard

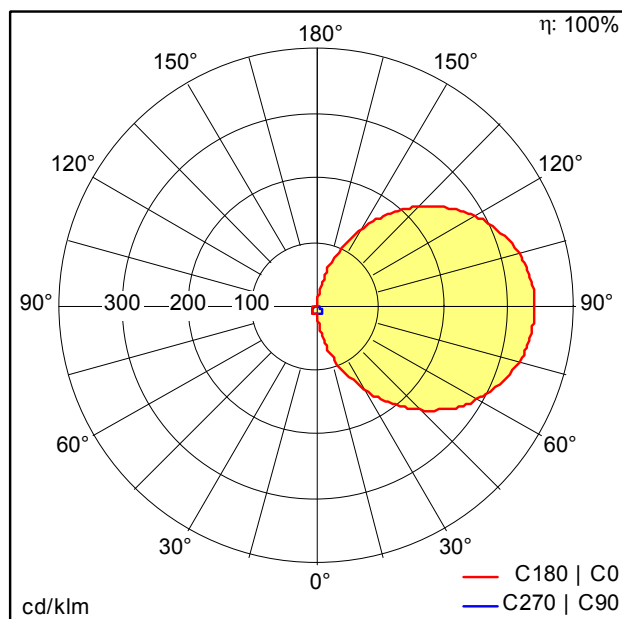

Viz také doplňkové informace na následující straně

- Světelný zdroj: LED
- Světelný tok*: 62 lm
- Celkový nouzový světelný tok: 74 lm
- Světelný výkon svítidel*: 10 lm/W
- Předřadník: 1 x 89800571 EM TR EM PowerLED NDA 100 DIM 5W
- Střední dimenzovaná životnost*: L90 50000h při/u 25°C
- Příkon svítidla*: 6,2 W Výkonový faktor = 0,77
- Příkon v pohotovostním režimu*: 1,3 W
- Řízení: Dali stmívatelné do 10%

