

LED SPOT

Spotlight module

600 lm light engine with a 60° beam angle and Colour rendering $R_a > 90$, colour temperature 3000 K. Complete with connector and driver.


Material: die-cast aluminium, black

Weight: 0.27 kg



Light Distribution

STD - standard

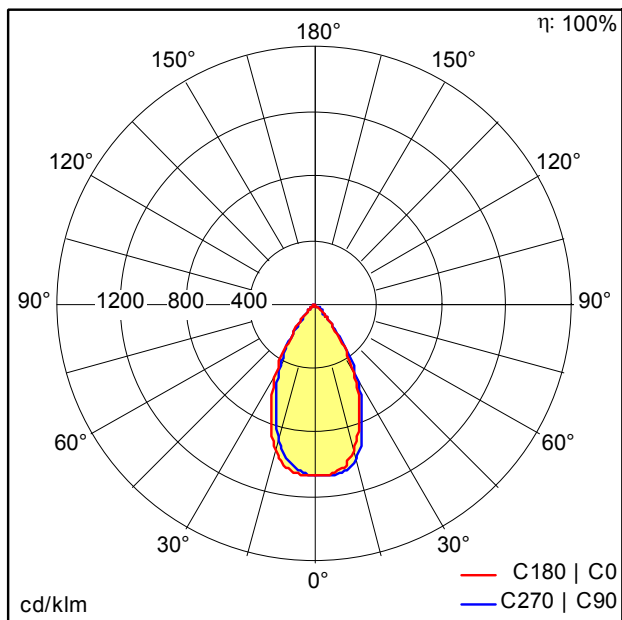

- Light Source: LED
- Luminaire luminous flux*: 600 lm
- Luminaire efficacy*: 100 lm/W
- Colour Rendering Index min.: 90
- Correlated colour temperature: 3000 Kelvin
- Chromaticity tolerance (initial MacAdam): 3
- Rated median useful life*: L80 50000h at 25°C
- Ballast: 1x LED_Con
- Luminaire input power*: 6 W Power factor = 0.9
- Dimming: PCDCG dimmable to 10%

All values marked with an * are rated values. Luminous flux and connected electrical load are subject to an initial tolerance of $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.